Nussbaum

INGROUND 1-PISTON LIFT

TOP LIFT 1.35 TLX

SURFACE MOUNTED

single pivotable

Move in height
98 mm

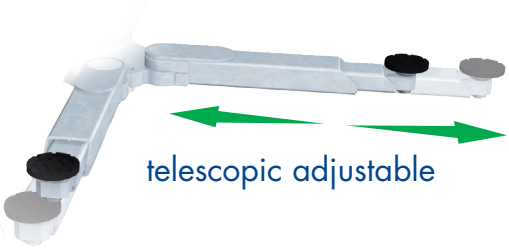

telescopic adjustable

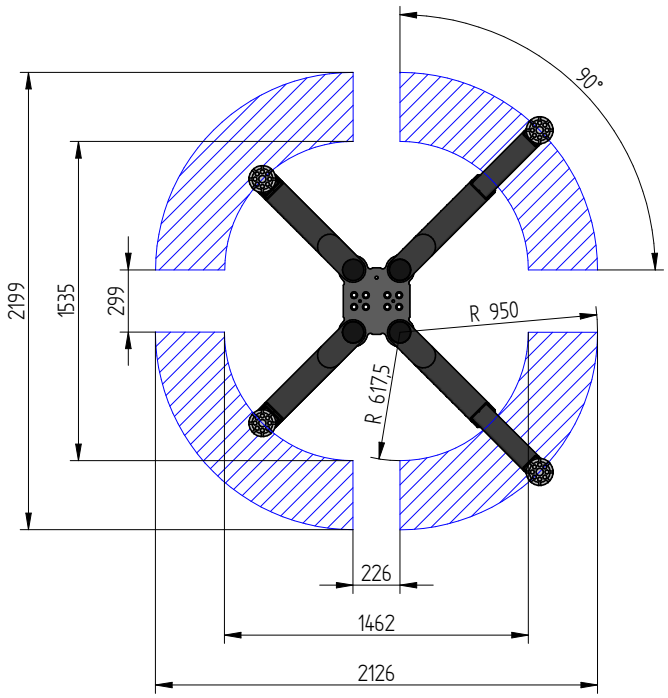

TECHNICAL DATA

Capacity	3500	kg
Effective raise height	2067	mm
Move in height	98	mm
Piston diameter	123	mm
Installation depth	2408	mm
Motor output	3,0	kW
Power connector	400 V/16 A	
Cable length to control	11	m
Lifting time	≈ 35	sec.
Lowering time	≈ 35	sec.

Support 1.35 TLX galvanized	0016774
Installation cassette STEEL 1-piston Installation cassette STEEL 1-piston galvanized	0016779
Lifting unit 3,5 t 1-piston - K pre-assembled in installation cassette	0016777
Lifting unit 3,5 t 1-piston - H packed in wooden box	0016782

ACCESSORIES

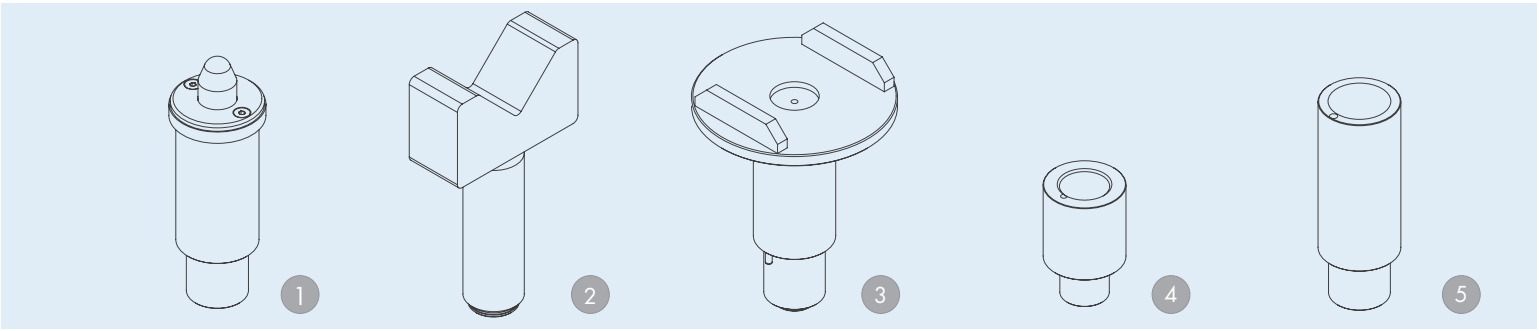

1 | Stacking adapter NCV3
d 45 x d 70 / 125-250 mm
0016743 (1set / 2 pcs.)

2 | Stacking adapter V-prism
d 45 / 182-312 mm
0016744 (1set / 2 pcs.)

3 | Stacking adapter U-form
d 130 x d 45 / 193-295 mm
0016745 (1set / 4 pcs.)

4 | Stacking adapter extension
80 mm
0016741 (1set / 4 pcs.)

5 | Stacking adapter extension
130 mm
0016742 (1set / 4 pcs.)