



THE REAL "WORK-HORSE" FOR YOUR TYRE SHOP!!

NEW

SX228 PRO



RACING SUPER-AUTOMATIC TILT BACK TYRE CHANGER WITH DUAL ASSIST ARM AND POWER X



Suitable for Tubeless tyre bead seating system (optional).



Robotic pipe for operating arm positioning/lock.

✓ Tilting tower, sliding horizontal arm with Ø 41 mm operating arm.

✓ Tyre inflation by pedal (standard).

✓ Tools Storage Box (standard).

✓ Fitting head designed for both standard and low profiled tyre applications.

POWERX grants **double** (uniform) clamping power on jaws, and an almost **endless durability** and **reliability** of your turntable!!! [Giuliano Patent].

✓ Tabletop thickness 14 mm w/**POWER X** four cylinders clamping system [Giuliano Patent].

A very practical **Wheel Lifter** reduces effort and increases productivity (optional).

✓ Double rotation speed by pedal.



✓ "Easy Access" extractable pedal box for quick service.



MOTOINVERTER
Faster, more accurate and reliable drive for your tyre changer.

Available in 3ph-2 speed, 1ph-2 speed (inverter) and 1ph - 1 speed version

✓ Reinforced Chassis and Tower.




SX228 Pro

www.giuliano-automotive.com



5 YEAR WARRANTY
ON POWERX and GEARBOX

EXTENSIVE SELECTION OF OPTIONAL ACCESSORIES

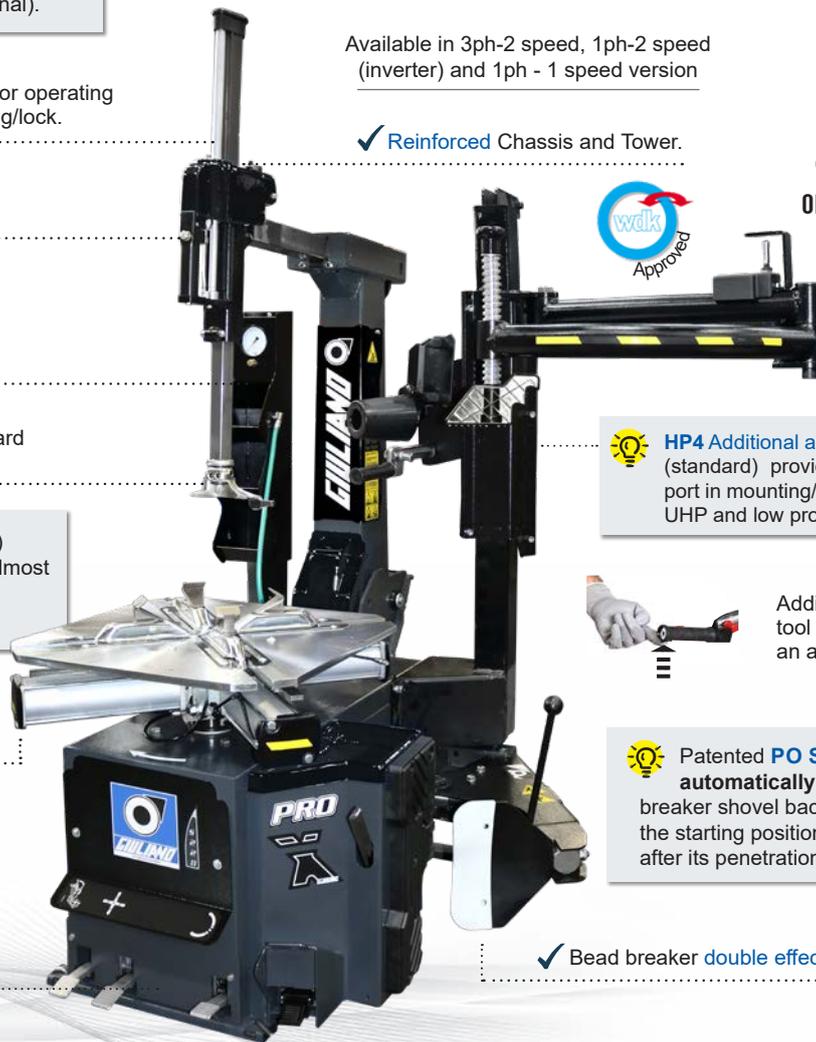

HP4 Additional auxiliary helper system (standard) provides a valuable support in mounting/demounting Run Flat, UHP and low profiled tyres.



Additional tilting roller tool for lower bead with an anti-collision joint.

Patented **PO SYSTEM** (standard) automatically moves the bead breaker shovel back to the starting position, after its penetration.



✓ Bead breaker double effect Cylinder Ø 200 mm.

✓ Adjustable bead breaker shovel stroke.



STANDARD FEATURES

Rim clamping from outside	10" - 27"
Rim clamping from inside	12" - 29"
Max. tyre diameter	1100 mm (43")
Max. tyre width	415 mm (16")
Bead breaker cylinder force at 10 Bar	30800 N
Operating pressure	10 bar (145 Psi)
Power supply	400V-3ph-2 speed 220V-1ph/220V-1ph-2 speed
Motor power	0,8 / 1,1 kW (3 ph)
Rotation speed	7 - 14 rpm
Pre-set tyre inflating pressure	3,5 bar (50 Psi)
Net weight	360 kg
Max. overall dimensions	1590x1930x2040 mm

STANDARD ACCESSORIES



DESIGNED, BUILT & ENGINEERED IN ITALY

• Bead lifting lever • Lube paste bucket and Brush • Plastic protectors for mounting/demounting tool • 2 Protectors for bead breaker shovel • Jaw protectors for alloy rims • Lubricator + Pressure regulator • Bucket support