



THE REAL "WORK-HORSE" FOR YOUR TYRE SHOP!!

NEW

**SX228 PRO DUO**



**RACING SUPER-AUTOMATIC TILT BACK TYRE CHANGER WITH COMBINED TWO ASSIST ARMS AND POWER X**



☀ Suitable for **Tubeless** tyre bead seating system (optional).



**MOTOINVERTER**

Faster, more accurate and reliable drive for your tyre changer.

**YouTube**  
Watch the video



SX228 Pro Duo

[www.giuliano-automotive.com](http://www.giuliano-automotive.com)



**5 YEAR WARRANTY**  
ON POWERX and GEARBOX



EXTENSIVE SELECTION OF OPTIONAL ACCESSORIES



✓ Robotic pipe for operating arm positioning/lock.

Available in 3ph-2 speed, 1ph-2 speed (inverter) and 1ph - 1 speed version


✓ Tilting tower, sliding horizontal arm with Ø 41 mm operating arm.

✓ Tyre inflation by pedal (standard).

✓ Reinforced Chassis and Tower.

✓ Fitting head designed for both standard and low profiled tyre applications.

✓ Tabletop thickness 14 mm with **POWERX** four cylinders clamping system [Giuliano Patent].

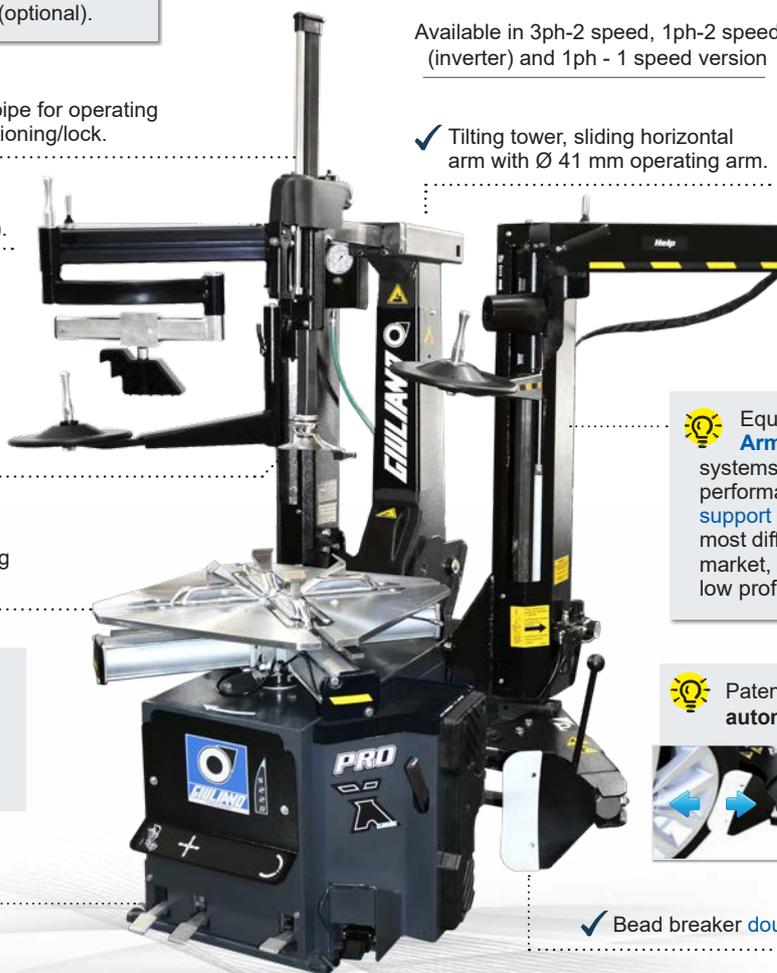

☀ Equipped with **Help** and **Press Arm** powerful pneumatic helper systems, to enhance tyre changer's performance and provide a **valuable support** in mounting/demounting most difficult tyre applications in the market, such as Run Flat, UHP and low profiled tyres.

☀ Patented **PO SYSTEM** (standard) automatically moves the bead breaker shovel back to the starting position, after its penetration.



✓ Bead breaker **double effect Cylinder** Ø 200 mm.

☀ **POWERX** [Giuliano Patent] grants **double** (uniform) clamping power on jaws, and an almost **endless durability** and **reliability** of your turntable!!!

✓ "Easy Access" **extractable** pedal box for quick service.



☀ A very practical **Wheel Lifter** reduces effort and increases productivity (optional).

✓ Double rotation speed by pedal.

✓ **Adjustable** bead breaker shovel stroke.



**STANDARD FEATURES**

Rim clamping from outside	10" - 27"
Rim clamping from inside	12" - 29"
Max. tyre diameter	1100 mm (43")
Max. tyre width	415 mm (16")
Bead breaker cylinder force at 10 Bar	30800 N
Operating pressure	10 bar (145 Psi)
Power supply	400V-3ph-2 speed 220V-1ph/220V-1ph-2 speed
Motor power	0,8 / 1,1 kW (3 ph)
Rotation speed	7 - 14 rpm
Pre-set tyre inflating pressure	3,5 bar (50 Psi)
Net weight	390 kg
Max. overall dimensions	1950x1930x2040 mm

**STANDARD ACCESSORIES**



DESIGNED, BUILT & ENGINEERED IN ITALY

• Bead lifting lever • Lube paste bucket and Brush • Plastic protectors for mounting/demounting tool • 2 Protectors for bead breaker shovel • Jaw protectors for alloy rims • Lubricator + Pressure regulator • Bucket support