

Best choice for mid volume tyre shops using efficient products.

**NEW**  
**5830**



S830

[www.giuliano-automotive.com](http://www.giuliano-automotive.com)

## DIGITAL ELECTRONIC 2-D WHEEL-BALANCER WITH VIDEO DISPLAY

✓ USB port for firmware updating via pen-drive.



Advanced software for further upgrades.\*

✓ Complete with Wheel guard, cones and quick clamping ring nut

✓ Flat screen HD color video monitor 19" TFT. Precise, reliable and easy to use software.

💡 Automatic measuring of wheel width through **SONAR LA** (optional)

### FUNCTIONS

- Automatic measuring of wheel diameter and distance
- Automatic START and STOP
- Static and dynamic balancing
- OPTIMATCH function
- Self-diagnosis and self-calibration
- Optimization of static unbalance
- CLIP system for application of stick-on weight


💡 **LASER LINE** for exact positioning of adhesive weights (optional).

💡 **LED LIGHT** on working area (optional).

💡 A very practical **Wheel Lifter** reduces effort and increases productivity (optional).



### ✓ SPECIAL ALU-S PROGRAMS



Programs for selecting the best correction planes for any kind and shape of alloy rim.

### ✓ SELF SELECTION MODE



Self-recognition of the Working program.

### ✓ HIDDEN WEIGHT



• Fast & Easy Split (FES) function, is really the fastest method on the market to split balancing weights behind the spokes of your aluminum wheel.

### ✓ OPPOSITE WEIGHT FUNCTION (OPF)



• Opposite Weight function (OPF), enables to place the balancing stick-on weight on the lower inside part of the aluminum wheel (at 6:00).

📍 \*The performance of the machine over time can improve, thanks to targeted updates.

EXTENSIVE SELECTION OF STANDARD ACCESSORIES

### OPTIONAL ACCESSORIES



- Wheel clamping adaptors
- Clamping cones with spacers
- Wheel lifter


[Find out more on our website !](http://www.giuliano-automotive.com)

### STANDARD FEATURES

Max. wheel weight	75 kg
Max. wheel diameter	1100 mm
Rim diameter	10"-30" / 255-765 mm
Rim width	1,5"-20" / 40-510 mm
Power supply	230V 1ph (50/60) Hz
Unbalance detection time	4,7 s (5 3/4"x14") 15 kg
Balancing speed	< 150 rpm
Balancing precision	+ 1 g
Net weight with guard	93 kg
Max. overall dimensions	1350x1150x1440+1540 mm

Available in: ● Blue Trim ● BlackTrim ● Red Trim

### STANDARD ACCESSORIES

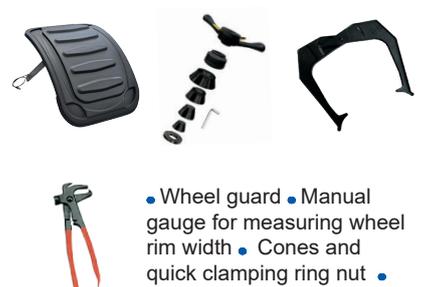

- Wheel guard
- Manual gauge for measuring wheel rim width
- Cones and quick clamping ring nut
- Counterweight pliers