

PAR-MOVE SERIES - STRONGER THAN EVER!!

NEW

SX119 PRO



PAR-MOVE CONCEPT HIGH PERFORMANCE SUPER-AUTOMATIC TYRE CHANGER WITH DUAL ASSIST ARM AND POWER X



Discover on our website!



5 YEAR WARRANTY ON POWERX, GEARBOX and PAR-MOVE



Lightbulb icon Suitable for Tubeless tyre bead seating system (optional)



MOTOINVERTER
Faster, more accurate and reliable drive for your tyre changer.

Available in 3ph-2 speed, 1ph-2 speed (inverter) and 1ph - 1 speed version

✓ Robust fixed vertical tower with innovative **parallelogram operating arm [Giuliano Patent]**.

✓ Vertical tower with **built-in air tank**

✓ Tools Storage Box (standard)

✓ Tyre inflation by pedal (standard)

✓ Fitting head designed for both standard and low profiled tyre applications

✓ **Reinforced Chassis.** Fixed vertical tower and parallelogram operating arm [Patented] makes SX119Pro **extremely robust** and stiff, granting **increased rigidity** and eliminating all flexes.



Lightbulb icon **POWER X** grants double (uniform) clamping power on jaws, and an almost **endless durability** and **reliability** of your turntable!!!

Lightbulb icon **HP119 Additional auxiliary helper system** (standard) provides a valuable support in mounting/demounting Run Flat, UHP and low profiled tyres.

✓ Tabletop thickness 14 mm with **POWER X** four cylinders clamping system [Giuliano Patent].


Lightbulb icon Patented **PO SYSTEM** (standard) automatically moves the bead breaker shovel back to the starting position, after its penetration.

✓ Double rotation speed by pedal

✓ Bead breaker **double effect Cylinder** ø 200 mm.

✓ Adjustable BB shovel stroke. Super-quick and Simple


✓ "Easy Access" extractable pedal box for quick service

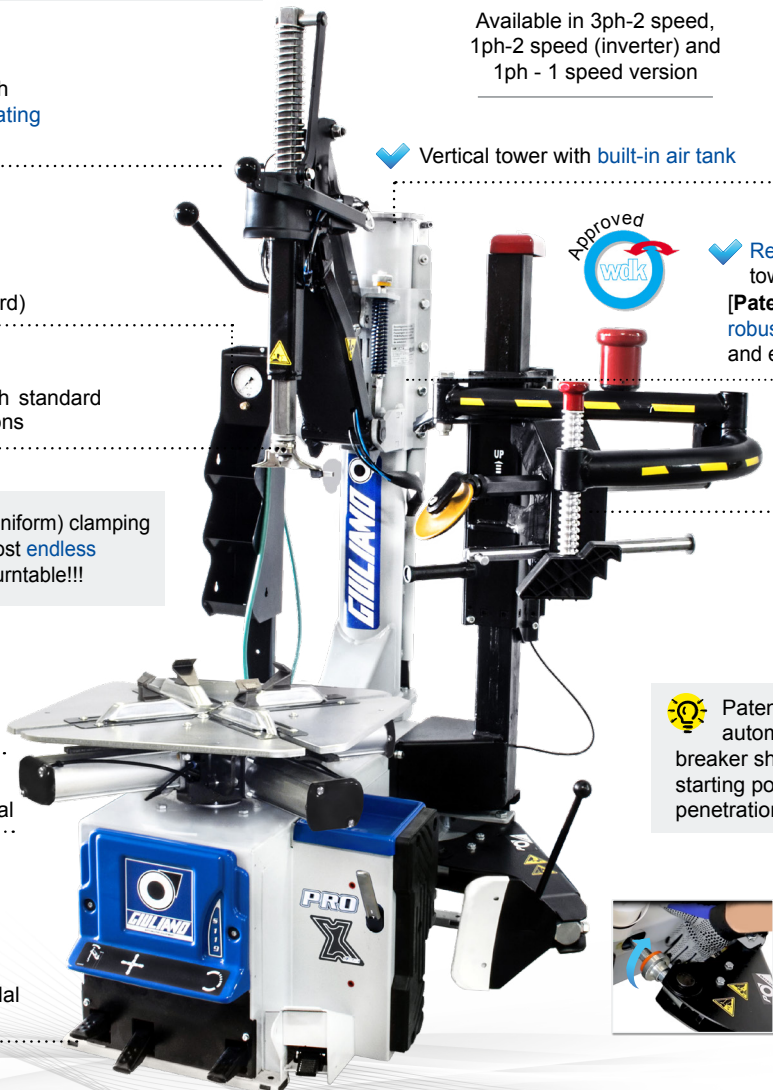

220V-1ph Inverter

Available in:
● Blue Trim
● Black Trim
● Red Trim

Lightbulb icon A very practical **Wheel Lifter** reduces effort and increases productivity (optional).



STANDARD FEATURES

Rim clamping from outside	10" - 27"
Rim clamping from inside	12" - 29"
Max. tyre diameter	1100 mm (43")
Max. tyre width	415 mm (16")
Bead breaker cylinder force at 10 Bar	30800 N
Operating pressure	10 Bar (145 Psi)
Power supply	400V-3ph-2 speed 220V-1ph/220V-1ph-2 speed
Motor power	0,8 / 1,1 kW (3 ph)
Rotation speed	7 - 14 rpm
Pre-set tyre inflating pressure	3,5 bar (50 Psi)
Net weight	408 kg
Max. overall dimensions	1390x1350x2170 mm

STANDARD ACCESSORIES



EXTENSIVE SELECTION OF STANDARD ACCESSORIES

Bead lifting lever ● Lube paste bucket and Brush ● Plastic protectors for mounting/demounting tool ● 2 Protectors for bead breaker shovel ● Jaw protectors for alloy rims ● Lubricator + Pressure regulator ● Bucket support