






# T4AX

|        |          |                |  |       |
|--------|----------|----------------|--|-------|
| Ref.   | kg       |                |  | AUX.  |
| 140202 | 4.000 Kg | 2.460-2.560Kg. | 3PH 400/230V- 3Kw 50Hz<br>1PH 230V-2,2Kw 50 Hz | 3,5Tn |

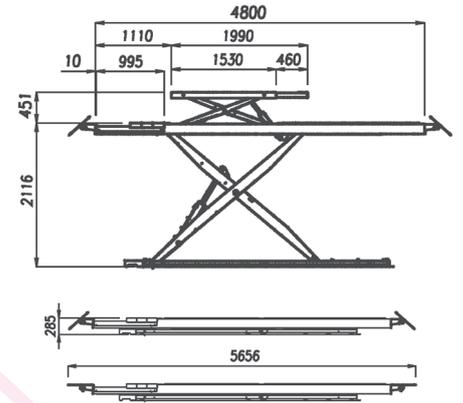

4800 mm x 660 mm x 285 mm

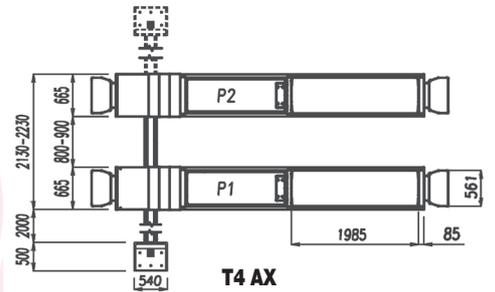

T4 AX



Ref. 14987F  
Inground version.



T4: Ref. 14950C  
T5.5: Ref. 14950C + 14970F

Onground lift with surface ramps.



**Lift and built in lifting table with double hydraulic circuit**  
(2 masters + 2 slaves). Hydraulic security .



**Extending lift table.**



New automatic system searching perfect levelling in each tooth.(A - AX - AXP)



Includes manual descend pump, regulator of the pneumatic pressure and water filter separator.



Very solid structure and base "solid profiles"



**T4**  
3 Trays.

Mobile front recess through regulating trays.



Includes sliding guide for Jacking Beams.



Pneumatic blocking system of alignment turn tables for easier handling.



Reinforce base of the lift -150 kg.- equipped with **16 regulation points.**



**Repairable during at least 10 years.**  
We ensure spare parts availability during at least this period.

## Accessories

### Olepneumatic Jacks

**TV 2000 H TV 2600 H**  
780 - 1610 (mod. 2 tns. - 2,6 tns.)

Platform Type

### Recess infills kit

**T4**  
**T5.5**  
**Ref.: 94345**  
**Ref.: 94346**

### Extension ramp

**T4**  
Extension to 2m. For T4 versions on floor.  
**Ref.: 14970F**

### Lightning kit

**LED 24 V**

No compatible with Jacking Beams.  
**Ref.: 34044**

### Rubber pads

**Ref.: 51001** 30 mm. **Ref.: 51002** 70 mm. **Ref.: 51003** 100 mm.

### Set of shock absorbers

**Set of shock absorbers:**  
**EVO** **Ref.: 44820**  
**T4 - T5.5** **Ref.: 94630**

### Hose kit

**T4-T5.5**

Supplied with console to the left. Available kits to: change the location of the console or extend standard distances: 2m - see the planes.

